TECHNICAL FILE

COR VISION TB

Transmittance

$U_W \geq 1.3$ (W/m²K)

Consult typology, dimensions and glass.

Acoustic insulation

Maximum glazing	**30 mm**
Minimum glazing	**26 mm**
Maximum acoustic insulation	**Rw = 41 dB**

Sightlines

Frame	116 mm 182 mm 3 rails
Sash	37 mm

Profile Thickness

Door	1.7 mm

Polyamide strip length

16 - 24 mm

Maximum dimensions / Sash

Width (L) = 2,500 mm

Height (H) = 3,000 mm

Consult maximum weight and dimensions according to typologies.

Maximum weight / Sash

320 kg

Categories achieved at test centre

Protection against atmospheric agents.

Air permeability
(UNE-EN 12207): Class 4

Water tightness
(UNE-EN 12208): Class 7A

Wind resistance
(UNE-EN 12210): Class C5

* Reference test 1.23 x 1.55 m / 1 sash + 1 fixed light

Security test: PAS24 ☑
Passed

Test verified by
ALUMINIOS CORTIZO S.A.U.

Extrusion alloy

6063 T-5

Finishes

Possibility of dual colour.

Colour powder coating (RAL, mottled & rough).
According to Qualicoat >60 microns

Wood effect powder coating.
According to Qualideco standard

Anodised.
According to Ewwa Euras / Standard Class 15 / Optionally Class 20 and 25

Opening possibilities

Sliding with 1, 2, 3, 4 & 6 sashes

Possibility of 1, 2 or 3 rails

Possibility of inner and outer corner sash at 90° without a mullion
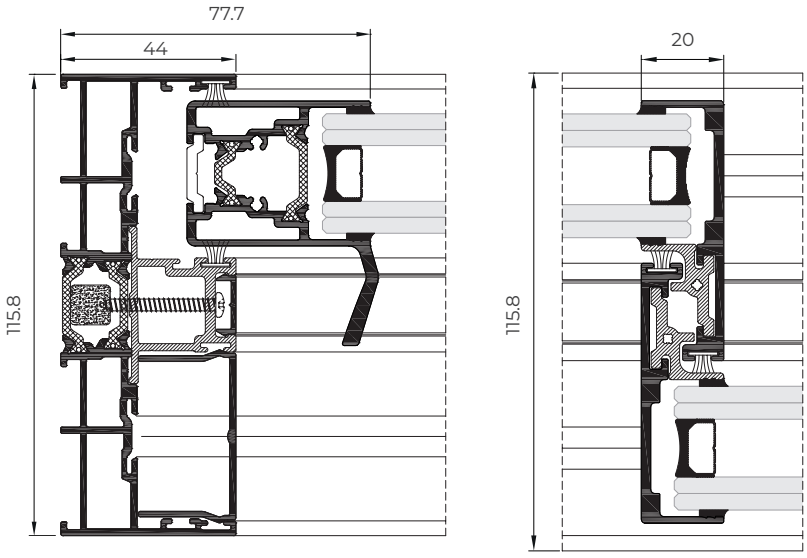
Pocket sliding door of 1, 2, 3, 4 & 6 sashes